



**B 8.255**  
接线端子参数

额定电参数  
压线范围  
螺钉力矩  
外壳  
工频耐电压  
绝缘抵抗  
使用温度


Rating  
Wire Range  
Screw/Torque Rating  
Insulator Body  
Insulation withstand Voltage  
Insulation Resistance  
Operating Temperature

300V, 20A  
22~12 AWG  
M3, 12Kgf c m  
PBT, UL94 V0  
AC2000, 1Min.  
1000MΩ, DC500V  
-40°C~+130°C



**B 8.255-H**

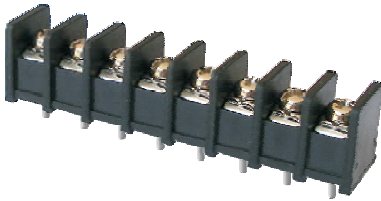

**How to Order**

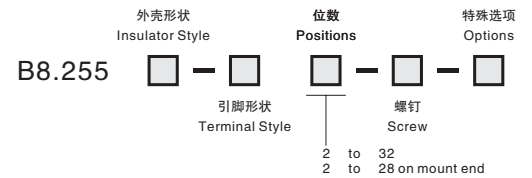

**B 8.255F-HE**

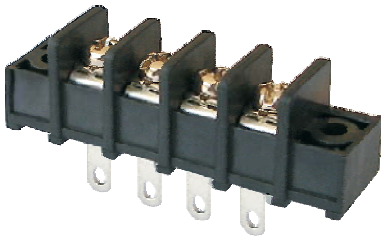

外壳形状  
Insulator Style



-/C: 无/有上盖

Without/With Cover

-/F: 无/有端部安装耳

Without/With Mount end

**B 8.255-HR**

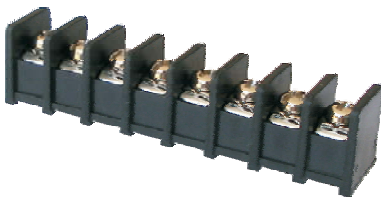

引脚形状  
Terminal Style

见左图

See left drawing

螺钉  
Screw

空白: 标准配置

Blank: Std. Screw

**B 8.255-VL**

