
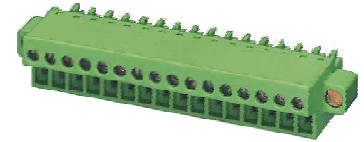



BL 1.5VRF

BL 1.5CAH




BL 1.5CAHF



Pitch:3.81(3.5) mm

Pitch:3.81 mm

Pitch:3.81 mm

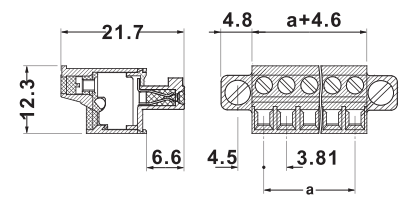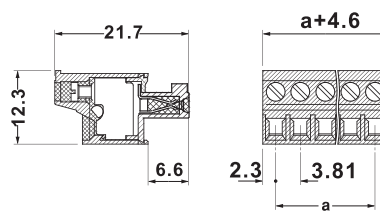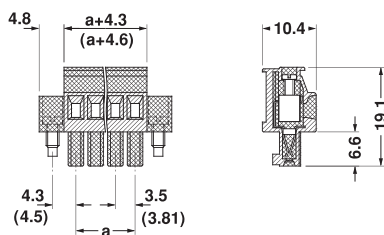

| IEC 数据 | 刚性导线 (mm ²) | 柔性导线 (mm ²) | AWG | I (A) | U (V) |
|-----------------|----------------------------|----------------------------|-------|----------|----------|
| 连接数据 | 0.08-1.5 | 0.08-1.5 | 28-16 | 8 | 160 |
| 绝缘材料组别 | I | | | | |
| 污染等级 | 3 | | | | |
| 过电压类别 | III III II | | | | |
| 额定电压(V) | 160 160 320 | | | | |
| 额定冲击电压(KV) | 2.5 | | | | |
| 绝缘材料/阻燃等级 UL 94 | PA/V0 | | | | |
| 螺钉/扭矩(-Nm) | M2/0.22-0.25 | | | | |
| 剥线长度(mm) | 7 | | | | |
| 线路板孔径(mm) | \ | | | | |
| 引脚尺寸(mm) | \ | | | | |

| UL 数据 | 额定电压(V)/电流(A) | 压线范围(AWG) |
|-------|---------------|-----------|
| | 300/8 | 30-14 |

| IEC Technical Data | Rigid (mm ²) | flexible (mm ²) | AWG | I (A) | U (V) |
|--|-----------------------------|--------------------------------|-------|----------|----------|
| Connection data | 0.08-1.5 | 0.08-1.5 | 28-16 | 8 | 160 |
| Insulating Material Group | I | | | | |
| Pollution degree | 3 | | | | |
| Overvoltage Category | III III II | | | | |
| Rate Voltage(V) | 160 160 320 | | | | |
| Rate impulse Voltage(KV) | 2.5 | | | | |
| Insulating material/Inflammability Class | PA/V0 | | | | |
| Screw/Torque(-Nm) | M2/0.22-0.25 | | | | |
| Stripping length(mm) | 7 | | | | |
| PCB Hole Diameter(mm) | \ | | | | |
| Pin Dimensions(mm) | \ | | | | |

| UL Technical Data | Rate Voltage(V)/Current(A) | Wire Range(AWG) |
|-------------------|----------------------------|-----------------|
| | 300/8 | 30-14 |

| 位数/No. of positions | 订货型号/Order No. |
|---------------------|-------------------|
| 2 | BL 1.5VRF-2-3.5 |
| ... | ... |
| 24 | BL 1.5VRF-24-3.5 |
| 2 | BL 1.5VRF-2-3.81 |
| ... | ... |
| 24 | BL 1.5VRF-24-3.81 |

| IEC 数据 | 刚性导线 (mm ²) | 柔性导线 (mm ²) | AWG | I (A) | U (V) |
|-----------------|----------------------------|----------------------------|-------|----------|----------|
| 连接数据 | 0.14-1.5 | 0.14-1.5 | 28-16 | 8 | 160 |
| 绝缘材料组别 | I | | | | |
| 污染等级 | 3 | | | | |
| 过电压类别 | III III II | | | | |
| 额定电压(V) | 160 160 320 | | | | |
| 额定冲击电压(KV) | 2.5 | | | | |
| 绝缘材料/阻燃等级 UL 94 | PA/V0 | | | | |
| 螺钉/扭矩(-Nm) | M2/0.22-0.25 | | | | |
| 剥线长度(mm) | 9 | | | | |
| 线路板孔径(mm) | \ | | | | |
| 引脚尺寸(mm) | \ | | | | |

| UL 数据 | 额定电压(V)/电流(A) | 压线范围(AWG) |
|-------|---------------|-----------|
| | 300/8 | 30-16 |

| IEC Technical Data | Rigid (mm ²) | flexible (mm ²) | AWG | I (A) | U (V) |
|--|-----------------------------|--------------------------------|-------|----------|----------|
| Connection data | 0.14-1.5 | 0.14-1.5 | 28-16 | 8 | 160 |
| Insulating Material Group | I | | | | |
| Pollution degree | 3 | | | | |
| Overvoltage Category | III III II | | | | |
| Rate Voltage(V) | 160 160 320 | | | | |
| Rate impulse Voltage(KV) | 2.5 | | | | |
| Insulating material/Inflammability Class | PA/V0 | | | | |
| Screw/Torque(-Nm) | M2/0.22-0.25 | | | | |
| Stripping length(mm) | 9 | | | | |
| PCB Hole Diameter(mm) | \ | | | | |
| Pin Dimensions(mm) | \ | | | | |

| UL Technical Data | Rate Voltage(V)/Current(A) | Wire Range(AWG) |
|-------------------|----------------------------|-----------------|
| | 300/8 | 30-16 |

| 位数/No. of positions | 订货型号/Order No. |
|---------------------|-------------------|
| 2 | BL 1.5CAH-2-3.81 |
| ... | ... |
| 24 | BL 1.5CAH-24-3.81 |

| IEC 数据 | 刚性导线 (mm ²) | 柔性导线 (mm ²) | AWG | I (A) | U (V) |
|-----------------|----------------------------|----------------------------|-------|----------|----------|
| 连接数据 | 0.14-1.5 | 0.14-1.5 | 28-16 | 8 | 160 |
| 绝缘材料组别 | I | | | | |
| 污染等级 | 3 | | | | |
| 过电压类别 | III III II | | | | |
| 额定电压(V) | 160 160 320 | | | | |
| 额定冲击电压(KV) | 2.5 | | | | |
| 绝缘材料/阻燃等级 UL 94 | PA/V0 | | | | |
| 螺钉/扭矩(-Nm) | M2/0.22-0.25 | | | | |
| 剥线长度(mm) | 9 | | | | |
| 线路板孔径(mm) | \ | | | | |
| 引脚尺寸(mm) | \ | | | | |

| UL 数据 | 额定电压(V)/电流(A) | 压线范围(AWG) |
|-------|---------------|-----------|
| | 300/8 | 30-16 |

| IEC Technical Data | Rigid (mm ²) | flexible (mm ²) | AWG | I (A) | U (V) |
|--|-----------------------------|--------------------------------|-------|----------|----------|
| Connection data | 0.14-1.5 | 0.14-1.5 | 28-16 | 8 | 160 |
| Insulating Material Group | I | | | | |
| Pollution degree | 3 | | | | |
| Overvoltage Category | III III II | | | | |
| Rate Voltage(V) | 160 160 320 | | | | |
| Rate impulse Voltage(KV) | 2.5 | | | | |
| Insulating material/Inflammability Class | PA/V0 | | | | |
| Screw/Torque(-Nm) | M2/0.22-0.25 | | | | |
| Stripping length(mm) | 9 | | | | |
| PCB Hole Diameter(mm) | \ | | | | |
| Pin Dimensions(mm) | \ | | | | |

| UL Technical Data | Rate Voltage(V)/Current(A) | Wire Range(AWG) |
|-------------------|----------------------------|-----------------|
| | 300/8 | 30-16 |

| 位数/No. of positions | 订货型号/Order No. |
|---------------------|-------------------|
| 2 | BL 1.5CAHF-2-3.5 |
| ... | ... |
| 24 | BL 1.5CAHF-24-3.5 |